
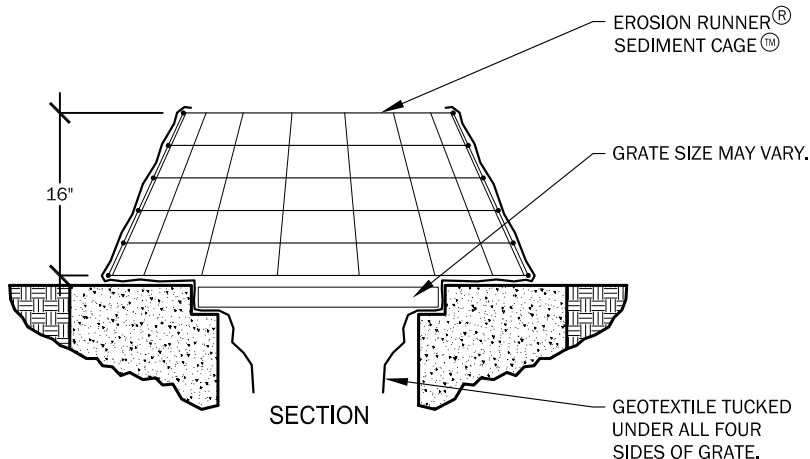


# SedCatch® Sediment Cage™

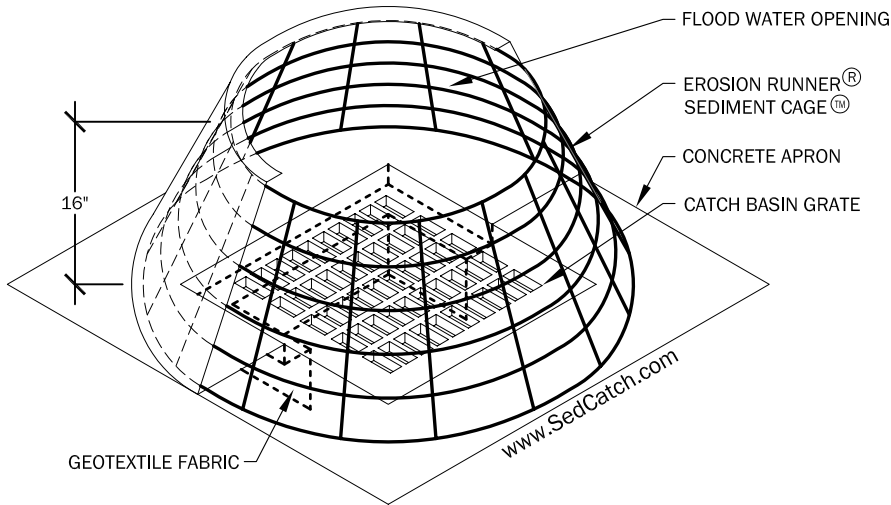

## SIZES:

### 32" SEDIMENT CAGE™

FITS SQUARE GRATES FROM 12" X 12" THROUGH 22" X 22"  
 FITS ROUND GRATES FROM 12" DIA. THROUGH 24" DIA.  
 FITS RECTANGULAR GRATES WITH A DIAGONAL BETWEEN 17" AND 31" ( $a^2+b^2=c^2$ )

### 42" SEDIMENT CAGE™

FITS SQUARE GRATES FROM 23" X 23" THROUGH 30" X 30"  
 FITS ROUND GRATES FROM 25" DIA. THROUGH 34" DIA.  
 FITS RECTANGULAR GRATES WITH A DIAGONAL BETWEEN 32" AND 41" ( $a^2+b^2=c^2$ )

### 52" SEDIMENT CAGE™

FITS SQUARE GRATES FROM 31" X 31" THROUGH 37" X 37"  
 FITS ROUND GRATES FROM 35" DIA. THROUGH 44" DIA.  
 FITS RECTANGULAR GRATES WITH A DIAGONAL BETWEEN 42" AND 51" ( $a^2+b^2=c^2$ )

### 62" SEDIMENT CAGE™

FITS SQUARE GRATES FROM 38" X 38" THROUGH 44" X 44"  
 FITS ROUND GRATES FROM 45" DIA. THROUGH 54" DIA.  
 FITS RECTANGULAR GRATES WITH A DIAGONAL BETWEEN 52" AND 61" ( $a^2+b^2=c^2$ )

## ADVANTAGES:

- INSTALLS IN MINUTES.
- DOES NOT RESTRICT OPENING IN A FLOOD.
- HEAVY WELDED FRAMEWORK WITHSTANDS JOBSITE ABUSE.
- CAN BE INSTALLED AT THE TIME THE BASIN IS SET.
- NO TRENCHING OR BACKFILLING.
- NO LANDSCAPING REPAIRS NEEDED UPON REMOVAL.
- RE-USABLE.

## INSTALLATION INSTRUCTIONS:

1. TUCK FABRIC UNDER GRATE.
2. SEAT GRATE WITHIN OPENING.

CUSTOM SIZES AVAILABLE  
 U.S. PATENT #D 555,759  
 OTHER PATENTS PENDING

**SedCatch® Environmental Products**  
[www.SedCatch.com](http://www.SedCatch.com)

## SEDCATCH® SEDIMENT CAGE™ NOTES

1. SEDCATCH® SEDIMENT CAGE™ SHOULD BE INSTALLED AT THE TIME THE STRUCTURE IS SET TO KEEP JOB IN COMPLIANCE AND TO PREVENT THE NEED TO CLEAN OUT THE STORM SEWER SYSTEM AT A LATER DATE.
2. FABRIC MUST BE PINCHED UNDER GRATE TO PREVENT SEDIMENT LADEN WATER FROM ENTERING STORM SEWER SYSTEM.
3. REMOVE SEDIMENT ONCE IT ACCUMULATES TO ½ THE HEIGHT OF THE SEDIMENT CAGE™
4. TO INCREASE EFFECTIVENESS AND REDUCE MAINTENANCE REQUIREMENTS, THE AREA AROUND THE SEDIMENT CAGE SHOULD BE AS FLAT AS POSSIBLE.